



SENNHEISER

SL Headmic 1

Model: SL Headmic 1
SL Headmic 1-4
SL Headmic 1-4 NC

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guía rápida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide
Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서

Sennheiser electronic GmbH & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 09/21, 587492/A02

In the box


	Connector					
SL Headmic 1	3.5 mm	•	•	•		
SL Headmic 1-4	3-Pin	•	•	•		
SL Headmic 1-4 NC	3-Pin	•	•	•	•	•

Setup

3.5 mm jack plug



3-Pin connector

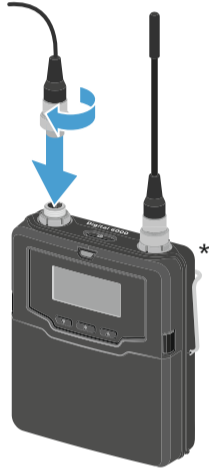

*not included

Frequency cap

MZC 1-2



+ 4 dB

MZC 1-1



+ 2 dB

or



Windshield

SL MZW 1



- 10 dB


Setup




or




1

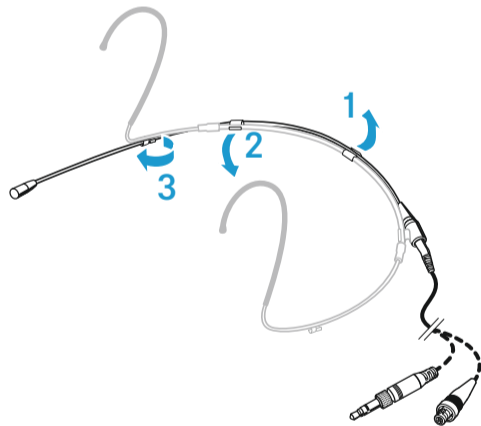



2

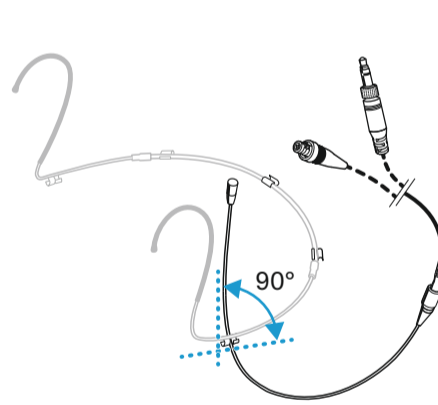

3


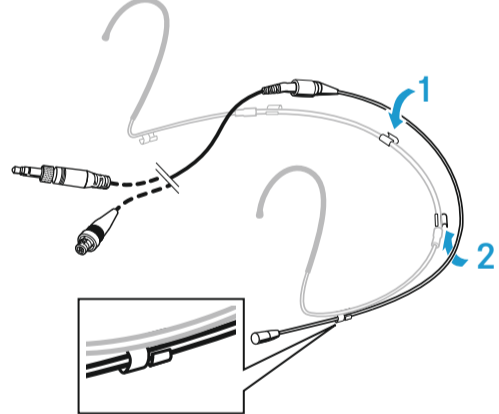


Use

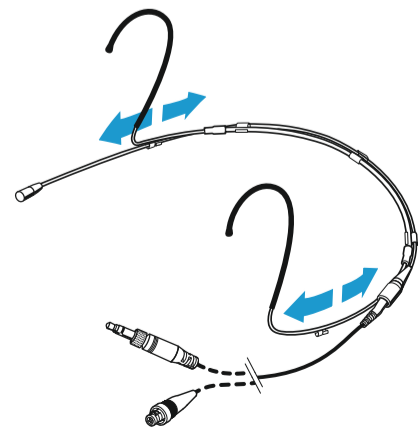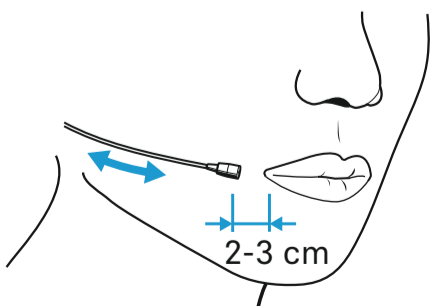



Accessory

MZQ 02*




*optional accessories


Cleaning

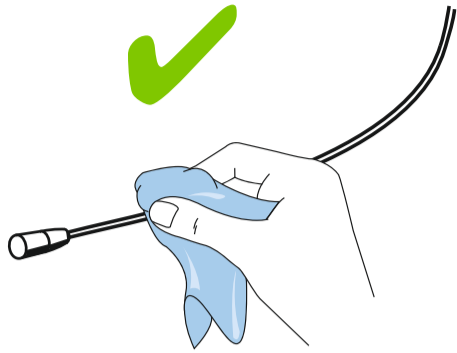


1




2



3




4



Specifications

Frequency response	20 - 20,000 Hz \pm 3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 k Ω
Min. terminating impedance	4.7 k Ω
Sensitivity	5 mV/Pa \pm 3 dB
Diameter of mic capsule	3.3 mm
Max. sound pressure level	143 dB
Equivalent noise level	27 dB(A)
Supply current	approx. 240 μ A
Power supply	4.5 - 15 V
Operating temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C
Storage temperature	-20 $^{\circ}$ C to +70 $^{\circ}$ C
Relative humidity	max. 95 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight (without cable)	7 g
Connector	3.5 mm jack plug or 3-Pin connector

Frequency response

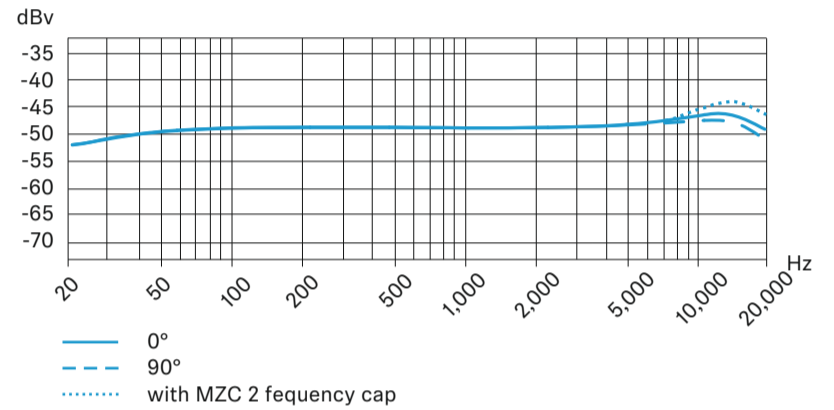

Polar pattern

